

PURIFA

Oczyszczacz powietrza

Instrukcja Obsługi

EBERG




Budowa urządzenia	03
Proces oczyszczania	04
Sterowanie	05
Wymiana filtra	06
Czyszczeni i konserwacja.....	07
Uwagi i ostrzeżenia	08
Rozwiązywanie problemów	11
Dane techniczne	12




www.eberg.eu

Opis elementów urządzenia

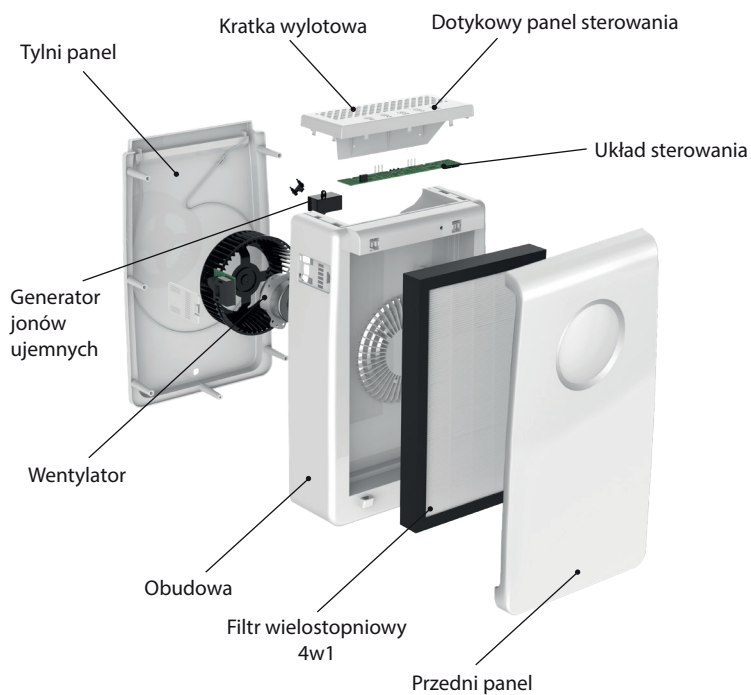

5 etapów oczyszczania powietrza

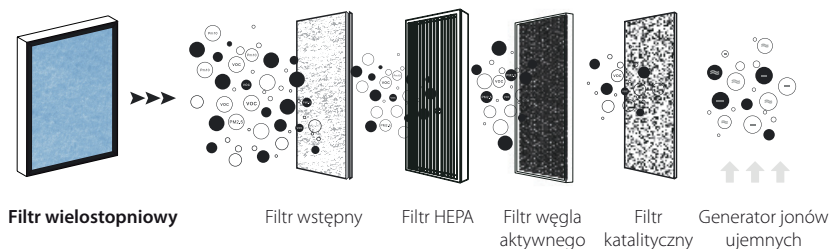


1. **Filtr wstępny** zatrzymuje kurz oraz inne większe zanieczyszczenia takie jak włosy czy sierść zwierząt domowych.
2. **Filtr HEPA (H13)** filtruje powietrze z większości zanieczyszczeń: cząstki ultra drobne (UFPs < 0.1 µm), pył zawieszony PM2.5 oraz PM10 oraz wirusy i bakterie.
3. **Filtr węgla aktywnego** adsorbuje zapachy oraz lotne związki organiczne (VOCs) m.in. toluen, ksylen i formaldehyd.
4. **Filtr katalityczny** tzw. zimnej katalizy adsorbuje nieprzyjemne zapachy oraz formaldehyd.
5. **Generator jonów ujemnych** wytwarza jony ujemne, które koagulują z zanieczyszczeniami tworząc większe cząsteczki, co jednocześnie ułatwia ich usuwanie z powietrza przez oczyszczacz.

Uwaga: Filtr wielostopniowy oryginalnie został zabezpieczony folią ochronną, którą należy usunąć przed zamontowaniem kasety do urządzenia. Nie usunięcie folii ochronnej może spowodować uszkodzenie urządzenia!

Funkcje urządzenia

Panel sterowania

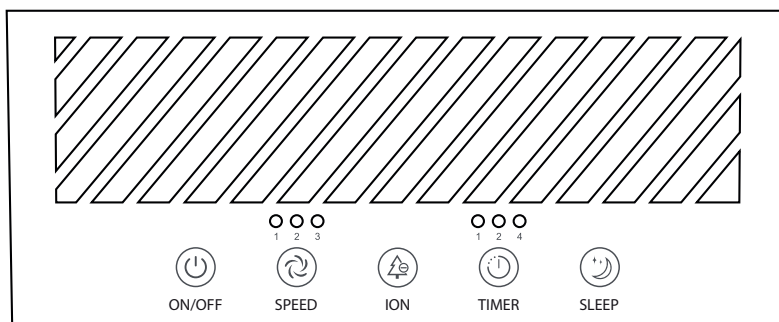

Opis funkcji sterowania

1. ON/OFF

Wciśnij przycisk *ON/OFF* w celu włączenia/wyłączenia urządzenia.

2. SPEED

Dostępnych jest kilka prędkości wentylatora. Wybierz tryb prędkości naciskając przycisk *SPEED*.

3. ION

Wciśnij przycisk *ION* w celu włączenia/wyłączenia generatora jonów ujemnych.

4. TIMER

Timer umożliwia zaplanowanie pracy urządzenia. Po upływie ustawionego czasu urządzenie automatycznie włączy lub wyłączy się. Naciśnij przycisk *TIMER*, następnie naciśnij go ponownie w celu wybrania schematu czasowego (1:00h-2:00h-4:00h). Ustawienia zostaną zapisane automatycznie. W celu ustawienia automatycznego **wyłączenia** wykonaj wyboru ustawień przy włączonym urządzeniu, natomiast w celu ustawienia automatycznego **włączenia** wykonaj wyboru schematu przy wyłączonym urządzeniu.

5. SLEEP

Wciśnij przycisk *SLEEP* aby przejść w tryb uśpienia urządzenia.


Jak wymienić filtr wielostopniowy?

1. Demontaż panelu przedniego


Chwyć obie strony górnej części panelu przedniego, a następnie pociągnij pokrywę w celu uwolnienia jej z zatrzasków (Rysunek 1).

2. Demontaż filtra

Chwyć kasetę filtracyjną i wyciągnij z obudowy (Rysunek 2).



Rysunek 1




Rysunek 2

3. Umieść filtr


Usuń folię ochronną z kasety filtracyjnej, następnie umieść ją w urządzeniu (Rysunek 3).

4. Załóż panel przedni

Umieść dolną krawędź przedniej pokrywki w obudowie urządzenia a następnie domknij pokrywę z wykorzystaniem zatrzasków (Rysunek 4).

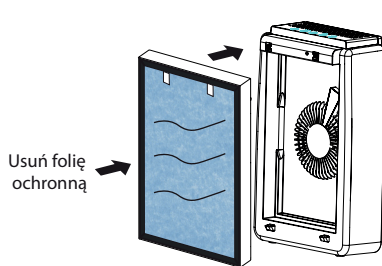

Rysunek 3



Rysunek 4

Jak dbać o urządzenie?

Czyszczenie obudowy urządzenia.


1. Odłącz urządzenie od zasilania.

2. Do usuwania brudu z zewnętrznej strony obudowy użyj lekko zwilżonej i ściereczki.
3. Do usunięcia uporczywych plam użyj niewielkiej ilości detergentu.

Uwaga: Przy wykonywaniu czynności czyszczących oraz konserwujących należy uważać aby nie zarysować obudowy urządzenia. Zdejmując obudowę w celu konserwacji postępuj zgodnie z instrukcją.

Wymiana filtra wielostopniowego

1. Oczyszczacz powietrza posiada wbudowany program informowania o wymianie filtra. Żywotność filtra może być różna w zależności od poziomu zanieczyszczeń filtrowanego powietrza.
2. W celu usunięcia zebranego kurzu na filtrze należy delikatnie odkurzyć przednią warstwę. Zaleca się powtarzanie czynności raz na dwa miesiące.

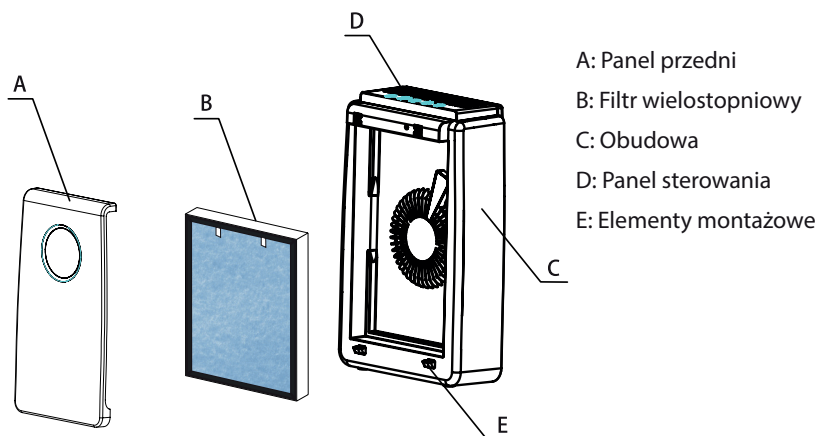




Uwaga: Zapoznaj się poniższymi instrukcjami aby zapobiec utracie zdrowia lub zniszczenia mienia

Poniższe informacje dotyczą prawidłowego wykorzystania urządzenia oraz uniknięcia wypadkowi.

1. Nie używać urządzenia z akcesoriami lub częściami zamiennymi niezatwierdzonymi przez producenta, niezastosowanie się powoduje utratę gwarancji.
2. Po rozpakowaniu, sprawdź czy urządzenie nie jest uszkodzone oraz czy zawiera wszystkie elementy wyposażenia.
3. Dzieci oraz osoby niepełnosprawne powinny pozostawać pod nadzorem opiekuna.
4. W przypadku nieprawidłowego działania należy odłączyć urządzenie od zasilania.
5. Urządzenie może być serwisowane wyłącznie przez wykwalifikowany personel.

Jeżeli przewód zasilający zostanie uszkodzony powinien zostać wymieniony przez personel producenta lub wykwalifikowanego elektryka.













	Czynności oznaczone tym znakiem są zabronione. Nie zastosowanie się do ostrzeżeń grozi wypadkiem.
	Czynności oznaczone tym znakiem powinny być wykonywane zgodnie z instrukcją, niezastosowanie się do instrukcji może doprowadzić do uszkodzenia urządzenia lub utraty zdrowia.
	Czynności oznaczone tym znakiem powinny być wykonywane zgodnie z instrukcją, niezastosowanie się do instrukcji może doprowadzić do uszkodzenia urządzenia.



Nie wkładać palców lub innych ciał obcych do wlotu lub wylotu powietrza.



Nie podłączać bezpośrednio do instalacji elektrycznej.

 Nie używać urządzenia w pomieszczeniach, w których występują łatwopalne gazy.	 Nie używać urządzenie jeżeli przewód zasilający lub wtyczka są uszkodzone.
 Nie używać urządzenia w pomieszczeniach o dużej zawartości wilgoci w powietrzu.	 Nie zasłaniać wlotu ani wylotu powietrza w oczyszczaczu.
 Nie używać urządzenia bez zamontowanej kasety filtracyjnej.	 Nie używać zużytej kasety filtracyjnej.
 Podłączyć urządzenie wyłącznie do zasilania o napięciu 230V.	 Odłączać wtyczkę od gniazdka chwytając wyłącznie za wtyczkę.
 Podczas czyszczenia i konserwacji lub gdy urządzenie nie jest używane należy odłączyć urządzenie od prądu.	 Regularnie usuwaj kurz z wtyczki.
 Nie używać silnie chemicznych detergentów do czyszczenia obudowy urządzenia.	 Czyść obudowę urządzenia korzystając z miękkiej ściereczki.



Nie używać urządzenia w pobliżu otwartego ognia oraz źródeł ogrzewania.



Nie czyścić urządzenia alkoholem oraz rozpuszczalnikami organicznymi.



Znak oznacza zagrożenie utraty zdrowia lub uszkodzenia urządzenia.



Przenosć urządzenie korzystając z uchwytów po obu stronach urządzenia. Nie przenosć urządzenia chwytając za przedni panel obudowy. Upadek urządzenia może spowodować uszkodzenie urządzenia.



Jeżeli działanie oczyszczacza powietrza wpływa na działanie radia lub telewizora, należy sprawdzić poniższe metody rozwiązania problemu:

- przestaw lub obróć antenę,
- zwiększ odległość urządzenia od odbiorników
- podłącz urządzenie i odbiorniki do osobnych gniazdek zasilających
- w przypadku potrzeby uzyskania pomocy skontaktuj się z serwisem producenta.



Dzieci oraz osoby niepełnosprawne powinny używać urządzenia wyłącznie pod nadzorem dorosłych.

FAQ

Problem	Rozwiązanie
Urządzenie nie włącza się.	1. Sprawdź prawidłowe podłączenie zasilania.
Wydajność urządzenia znacząco się zmniejszyła.	1. Sprawdź czy filtr został zainstalowany poprawnie oraz czy usunięto folię ochronną. 2. Sprawdź czy wlot oraz wylot powietrza nie jest zablokowany i udroźnij je. 3. Sprawdź czy filtr nie został zanieczyszczony. Wymień go na nowy.
Urządzenie nie poprawia znacząco jakości powietrza.	1. Sprawdź czy filtr został zainstalowany poprawnie. 2. Zanieczyszczone powietrze zewnętrzne może wydłużyć proces filtracji powietrza w pomieszczeniu. Zadbaj o nie otwieranie okien w przypadku występowania podwyższonych poziomów zanieczyszczeń w powietrzu zewnętrznym. 3. Urządzenie zostało umiejscowione w miejscu z utrudnionym dostępem do poboru powietrza. Postaw urządzenie w miejscu ze swobodnym dostępem do powietrza. 4. Kaseta filtracyjna została zabrudzona. Wymień ją na nową.
Z urządzenia wydobywa się nieprzyjemny zapach.	5. Filtr wielostopniowy został zabrudzony. Wymień go na nowy.

Uwaga: Jeżeli zastosowanie się do powyższych instrukcji nie rozwiązało problemu, skontaktuj się z autoryzowanym serwisem. Nie zaleca się przeprowadzania napraw urządzenia we własnym zakresie.




Prawidłowe sposoby pozbycia się tego sprzętu

To oznaczenie oznacza, że tego sprzętu nie należy wyrzucać wraz z innymi odpadami domowymi w całej UE. Aby zapobiec potencjalnym szkodom dla środowiska lub zdrowia ludzkiego w wyniku niekontrolowanego usuwania odpadów, należy je poddać recyklingowi w celu promowania zrównoważonego ponownego wykorzystania zasobów materialnych.

Parametry techniczne

MODEL	PURIFA
NAPIĘCIE ZASILANIA	~230 V / 50Hz
MAX. POBÓR MOCY	45W
CADR (PYŁ ZAWIESZONY)	218 m³/h
FILTRY	PRE-FILTER, HEPA H13, ACTIVE CARBON FILTER, COLD CATALYST FILTER
GENERATOR JONÓW UJEMNYCH	40 mIn/cm³
TRYB PRACY	3-speed, timer, sleep mode
MOC AKUSTYCZNA	29-61dB(A)
POZIOM HAŁASU	22-54 dB(A)
WAGA	5 kg
WYMIARY	34 x 53,8 x 16,6 cm

Schemat elektryczny

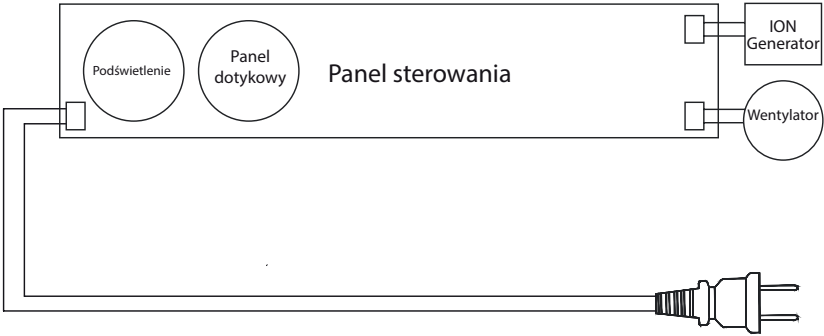

PURIFA

Air Purifier

Operating Instructions

EBERG



Construction of device 15

Air purifier technology..... 16

Function of control panel 17

Replacement of the Filter 18

Cleaning and maintenance 19


Warnings 20

Troubleshooting 23


Technical Specification 24



Construction of the device

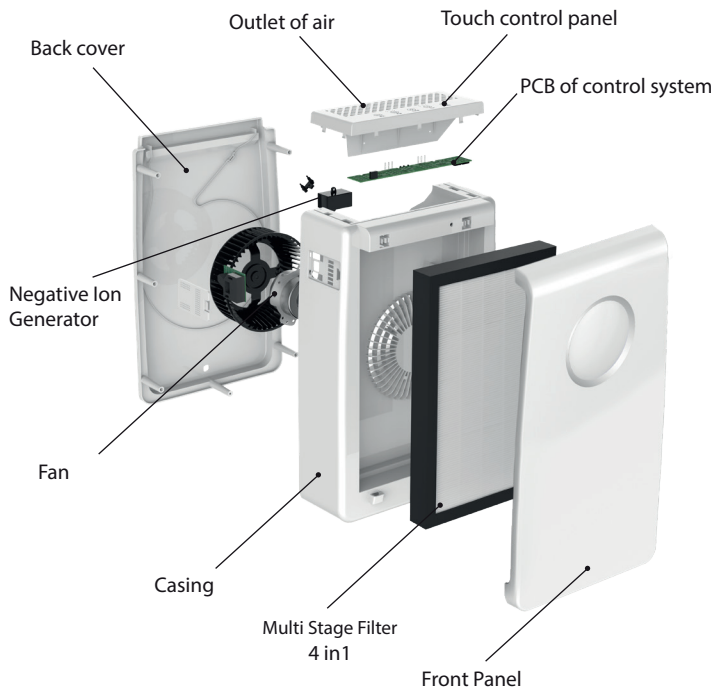

Purification Process

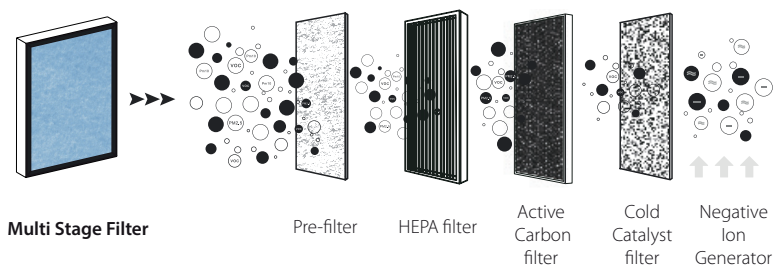


1. **Pre-filter** removes pollutants such as dust, hair, pet dander, large pollens etc.
2. **HEPA (H13) filter** removes pollutants such as ultrafine particles (UFPs < 0.1 μm), particulate matter PM2.5 and PM10, viruses and bacteria.
3. **Active Carbon filter** absorbs harmful odours and volatile organic compounds (VOCs) such as toluene, xylene and formaldehyde.
4. **Cold Catalyst filter** absorbs harmful odours and formaldehyde.
5. **Negative Ion Generator** produces negative ions which are dispelled into the room where they attach to particulate matter to form larger particles, which can more easily be trapped by your air cleaners filters.

Uwaga: The filter is originally protected with a protective foil, which must be removed before using the filter. If you do not remove it, the device can be damaged!

Control Panel

Control Panel Instruction

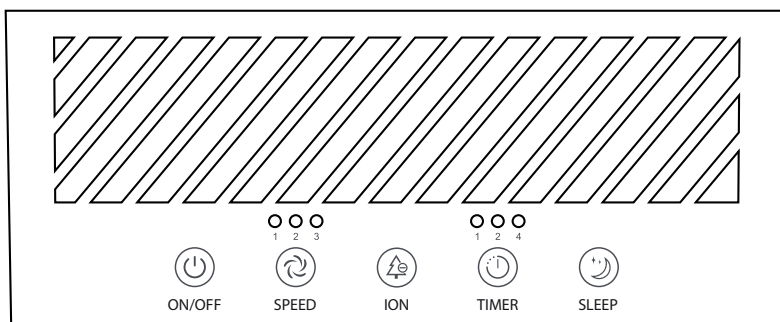

Functions Instruction

1. ON/OFF

Press *ON/OFF* button to switch on/off the device.

2. SPEED

Press button *SPEED* to choose air speed.

3. ION

Press *ION* button, open or close the function of Negative Oxygen Ion.

4. TIMER

Timer allows planning a work schedule. After the set time has expired, the device will automatically turn on or off. Press the *TIMER* button, then press it again to select the time schedule (1: 00h-2: 00h-4: 00h). The settings will be saved automatically. To set the automatic **switch off**, perform the selection of settings when the device is switched on, and in order to set the automatic **switch on**, select of the scheme with the device switched off

5. SLEEP

Press *SLEEP* button to enter the sleep mode.


How to replace the filter?

1. Remove the front panel.


Grasp both sides of the upper part of front cover with both hands, then lift it up before drag it towards your own direction (Picture 1).

2. Remove the filter

Hold the composite filter mesh and drag it towards your own direction (Picture 2).



Picture 1




Picture 2

3. Attach the filter


Remove the protective foil of the filter, and with one side with the handle towards the outside, insert the filter (Picture 3).

4. Attach the front panel

Link the bottom side of the front cover with the device body, then align the front cover with two slots (Picture 4).

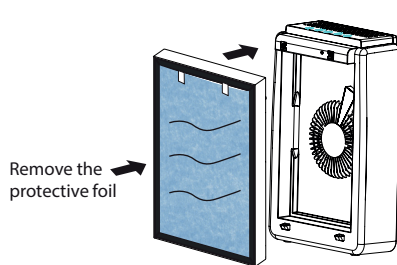

Picture 3



Picture 4

How to clean the device?

Cleaning the device body.

1. Unplug the device each time before cleaning.

2. Clean the stains using only soft cloth.


3. To clean stubborn stains use a soft cloth with the proper amount of neutral detergent to clean.

Caution: Do not scratch the device body while maintenance with hard objects. When removing the surface cover, please operate in accordance with the instruction manual and do not damage device components.

Replacement of the filter

1. The change of filter is reminded by the built-in program. But because of different pollution extent of the actual environment, the lifespan of the filter differs.

2. When dust accumulates on the composite filter surface, one may use gently a vacuum cleaner to remove dust from the surface to lengthen the lifespan of the filter. It is suggested for cleaning the filter once every two months

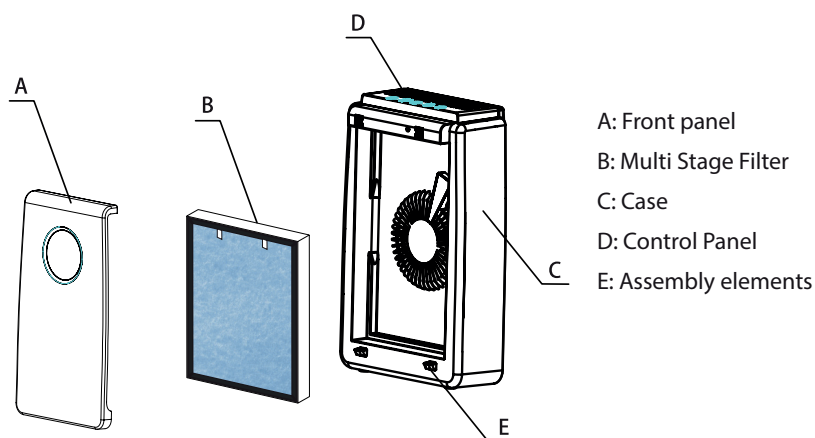




Notice: All the content in this part is concerned with safety and have to be strictly followed by the user.

Matters need attention in this part is for the right usage of this product and avoid injury and possible accidents.

- 1. Do not use other accessories without permits of the manufacturer. If it causes malfunction of the device, the warranty shall automatically terminate.
- 2. After unpacking, please check whether the product is damaged and accessories are complete.
- 3. Children and people without a capacity for a civil product should be supervised by their guardians to use this product.
- 4. In the case of malfunctions, disconnect the device from the mains socket immediately. Do not maintain the defective product in a working state.
- 5. This product can only be repaired by authorized maintenance centre.

If power cord damages, it shall be replaced by the specialist personnel of the manufacturer to avoid dangers.













	Action with this sign is strictly prohibited. Otherwise, it may cause damage to the product or endanger the personal security of the user.
	Action with this sign should be strictly operated according to the instruction. Otherwise it may cause damage to the product or endanger the personal security of the user.
	Action with this sign should be paid attention by the user. Otherwise, operation error can cause damage to the product or other losses.









Do not insert your finger or foreign matters in air inlet or air outlet



Do not disconnect or connect mains socket

 <p>Please do not use air purifier in the environment full of inflammable gas such as hydrogen, natural gas and propane.</p>	 <p>Please do not use air purifier when the power cord or plug is damaged or the power outlet on the wall gets loose.</p>
 <p>When using aerosol bomb, Please do not use this product. When there is oil residue, smoke produced by burning incense, flame produced by lighting up cigarettes, chemicals odors in the room, please do not use this product. Please do not use this product where the moisture is very heavy.</p>	 <p>Please do not block air inlet or air outlet.</p>
 <p>Please do not operate this device without installing filter.</p>	 <p>Please do not clean or reuse composite filter mesh.</p>
 <p>Only standard power outlet with 220v voltage can be used.</p>	 <p>When disconnecting plug, please hold the plug firmly and do not drag power cord, otherwise it may cause electric shock or fire disaster led by short circuit.</p>
 <p>When cleaning or stop using this product, please disconnect plug from power outlet, otherwise it may cause electric shock led by defective insulation or fire disaster led by short circuit.</p>	 <p>Regularly clean dust on plug</p>
 <p>One shall be careful when cleaning air purifier because strong corrosive detergent may damage the product's surface.</p>	 <p>Use only soft cloth to clean the product's surface, otherwise the product may get damaged or cracked down.</p>

 <p>When using this product, please do not use it near or on heat sources (such as fireplace, stove or place easy to get access to inflammable gas).</p>	 <p>Please do not wipe this product with ethyl alcohol, organic solvent, otherwise it may cause damage to the product or electric shock that may lead to injury or fire disaster.</p>
 <p>This sign suggest that there is possibility to cause injury or material damage.</p>	 <p>When moving this device please hold handle on both sides of the device firmly. When moving this device, holding the front cover may lead to the falling-off of the cover. Falling down of device body can cause personal injury.</p>
 <p>If this air purifier causes any interference to radio or television, please try the following one or multiple measures to correct interference:</p> <ul style="list-style-type: none">• Readjust or rotate receiving antenna.• Please lengthen the distance between air purifier and radio/television.• Please connect power of the device and acceptor separately with different mains socket.• If you need any assistance, please contact dealers or professional technical personnel of radio or television.	 <p>This device is not suitable for the disabled, the perceptual handicapped, the mental handicapped or children to operate alone. On-site supervision or guidance provided by safety directors to operate this device makes an exception.</p>

Frequently Asked Questions

Failure Phenomenom	Possible Reasons and Solutions
Failure to start the device	1. Check the correct power supply.
Little volume of air from air outlet	<ol style="list-style-type: none"> 1. Packaging bag of filter is unpacked. Remove the packaging bag and install filter again. 2. Air inlet or outlet is blocked by foreign matters. Remove them. 3. Filter is dirty. Clean or replace it.
Not apparent dust removal and purifying effect Not obvious improvement of air quality	<ol style="list-style-type: none"> 1. Filter is not installed on the device. Install the filter. 2. Window or door is frequently opened. room with slow air flow, because the outside dirty air comes in, it takes a longer time to purify the indoor air. 3. The device is located in a place with difficult access to air. Locate the device in a place with free access to air. 4. The filter is filthy, and thus affects purifying effect. Clean or replace it.
Peculiar Smell from the air outlet	1. The filter is quite filthy. Change for a new filter.

Notice: If one is unable to remove faults through the above instructions, please contact the customer service centre. Please do not repair it on one's own to avoid dangers and possible damage to the device.




This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Main Technical Parameter

MODEL	PURIFA
VOLTAGE	~230 V / 50Hz
MAX. POWER CONSUMPTION	45W
CADR (PARTICULATE MATTER)	218 m³/h
FILTERS	PRE-FILTER, HEPA H13, ACTIVE CARBON FILTER, COLD CATALYST FILTER
ION GENERATOR	40 mIn/cm³
MODE	3-speed, timer, sleep mode
SOUND POWER	29-61dB(A)
NOISE LEVEL	22-54 dB(A)
WEIGHT	5 kg
DIMENSIONS	34 x 53,8 x 16,6 cm

Electrical Scheme

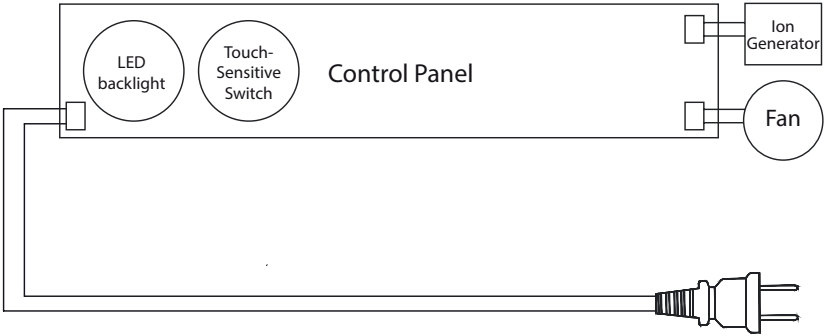



www.eberg.eu

Climateo.eu Sp. z o.o.
Ciepłownicza 54 31-574 Krakow | Poland
ID/VAT: PL5272438859 | Phone: +48 12 262 97 05
email: contact@eberg.eu
